
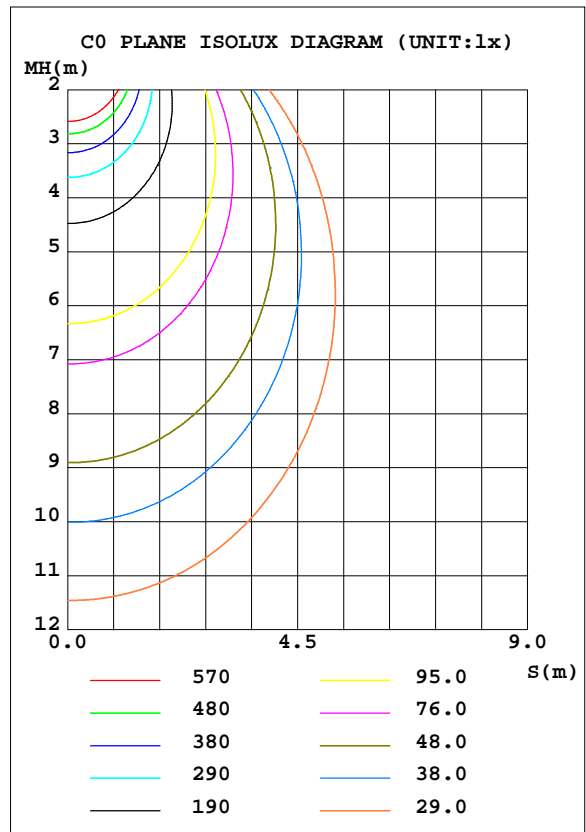


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.79 lm/W			
MODEL		I _{max} (cd)	3840	S/MH(C0/180)	1.18
NOMINAL POWER(W)	80	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	10372	η UP, DN(C0-180)	1.2,50.0
NOMINAL FLUX(lm)	10371.5	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,47.5
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	1.35

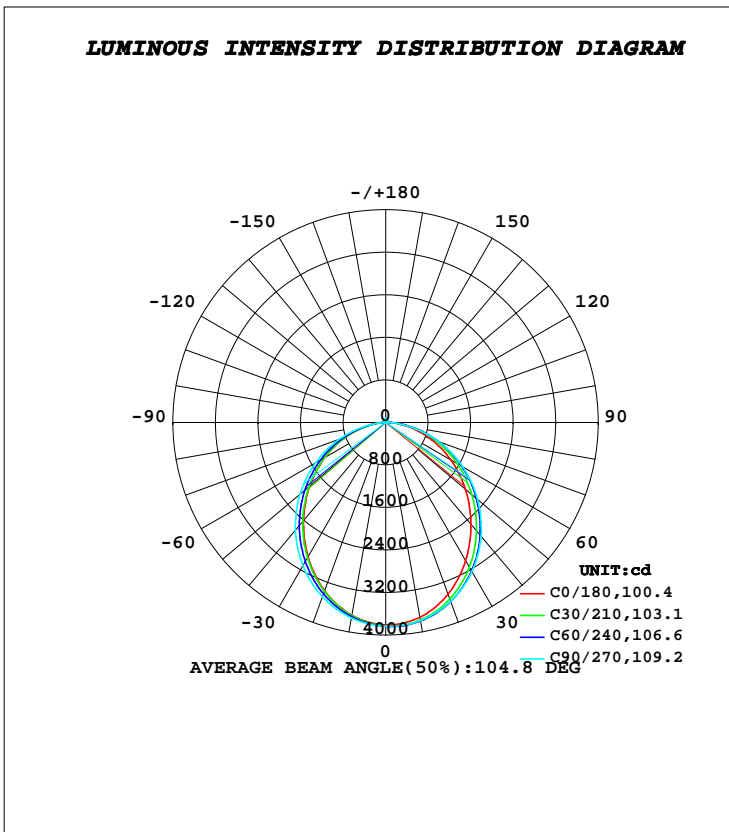

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3720	3781	3781	3728	3681	3697	3732	3744	0- 10	360.8	360.8	3.48,3.48
20	3436	3557	3581	3459	3367	3404	3488	3491	10- 20	1021	1382	13.3,13.3
30	3006	3188	3242	3059	2920	2983	3113	3096	20- 30	1515	2897	27.9,27.9
40	2498	2712	2792	2568	2409	2480	2648	2604	30- 40	1777	4674	45.1,45.1
50	1961	2172	2260	2025	1870	1937	2110	2064	40- 50	1792	6466	62.3,62.3
60	1418	1607	1677	1465	1321	1373	1524	1501	50- 60	1581	8047	77.6,77.6
70	888.3	1031	1067	892.1	793.7	815.9	928.8	940.5	60- 70	1190	9237	89.1,89.1
80	391.7	475.0	460.4	355.6	309.0	301.0	362.0	406.8	70- 80	682.3	9919	95.6,95.6
90	33.09	55.72	38.42	23.27	23.16	26.25	28.22	37.09	80- 90	193.0	10112	97.5,97.5
100	20.81	21.87	24.19	24.32	27.09	30.65	32.45	28.80	90-100	27.49	10139	97.8,97.8
110	27.00	27.59	30.31	30.47	33.05	36.68	37.70	34.36	100-110	30.88	10170	98.1,98.1
120	34.06	33.79	36.19	37.33	39.82	43.49	42.92	40.21	110-120	35.03	10205	98.4,98.4
130	41.54	40.29	42.94	44.69	46.70	50.62	49.52	46.22	120-130	37.52	10243	98.8,98.8
140	48.60	47.60	50.87	52.12	53.14	57.68	57.55	53.01	130-140	37.83	10281	99.1,99.1
150	55.46	55.34	59.01	59.35	58.91	64.06	64.84	59.72	140-150	35.15	10316	99.5,99.5
160	62.88	63.69	66.98	66.33	64.76	69.57	70.88	66.00	150-160	29.08	10345	99.7,99.7
170	70.12	71.15	73.28	72.10	70.12	73.48	74.81	71.40	160-170	19.58	10365	99.9,99.9
180	72.92	75.14	76.32	74.52	72.95	75.00	76.36	74.60	170-180	6.998	10372	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

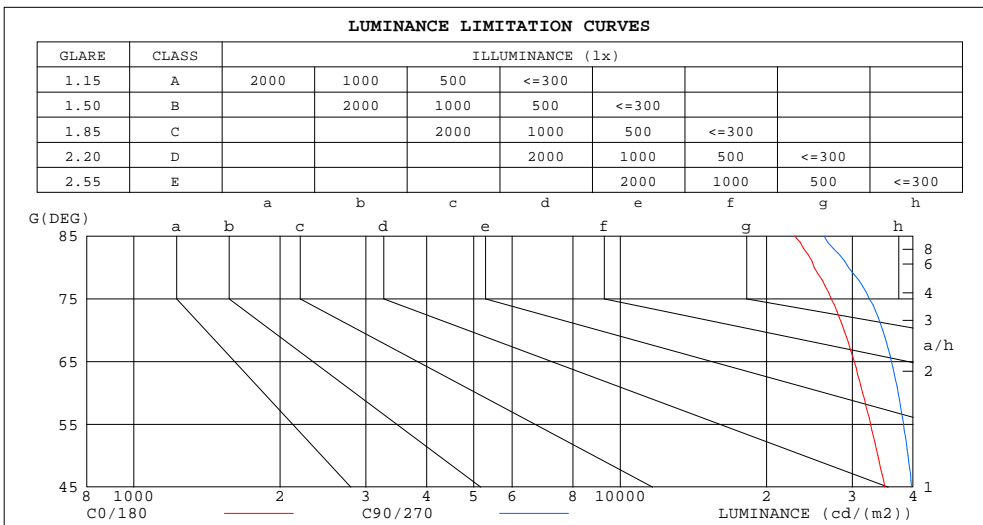

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	22866	26254
80	25067	29459
75	27171	32542
70	28856	34647
65	30290	36131
60	31513	37273
55	32705	38250
50	33891	39070
45	34974	39732


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.97
1.0	1.04	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.84	.78	.88	.82	.77	.84	.79	.75	.81	.76	.73	.77	.74	.71	.68
3.0	.80	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.68	.64	.60	.58
4.0	.71	.62	.55	.69	.61	.55	.66	.59	.54	.64	.58	.53	.61	.56	.52	.49
5.0	.63	.54	.48	.62	.53	.47	.59	.52	.47	.57	.51	.46	.55	.50	.45	.43
6.0	.57	.48	.42	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.42	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.24

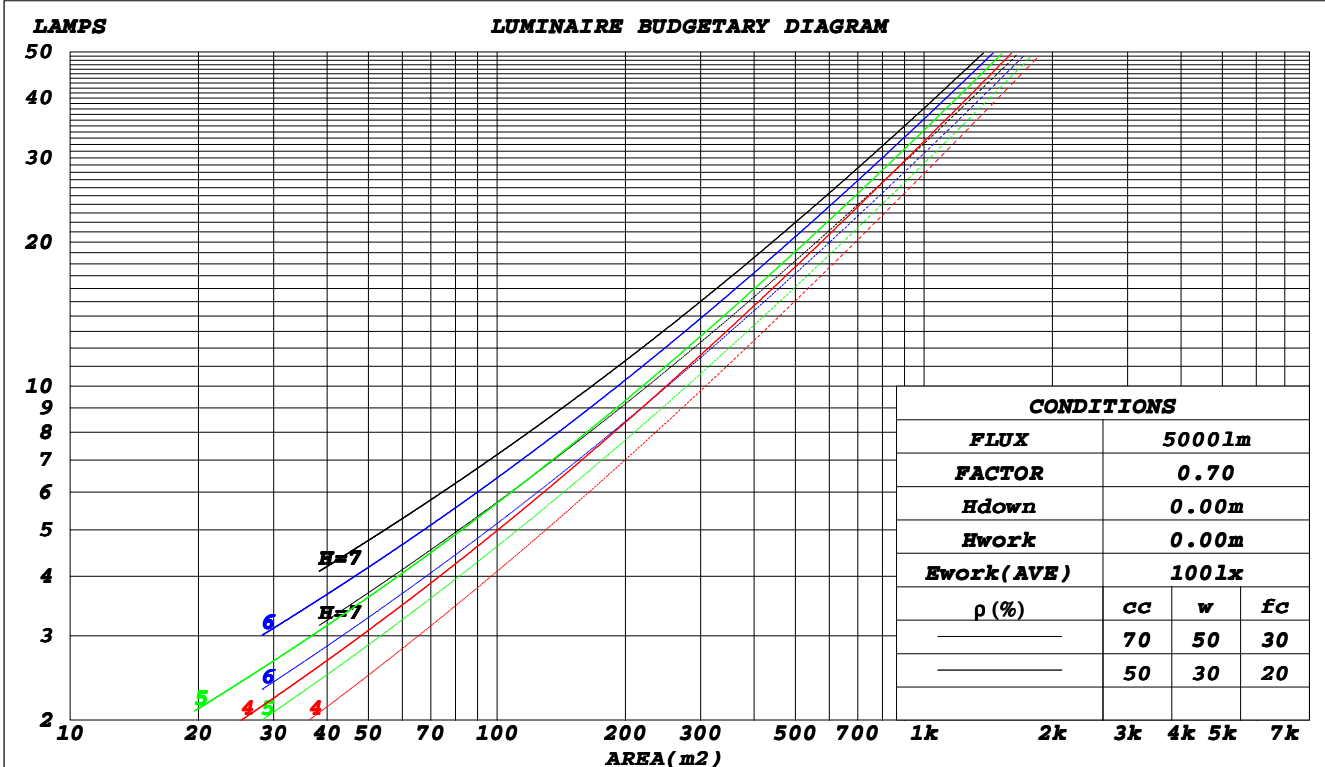

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.305	.173	.055	.297	.169	.054	.282	.162	.052	.269	.155	.050	.256	.149	.048	
2.0	.286	.157	.048	.279	.154	.047	.267	.148	.046	.255	.143	.045	.244	.138	.043	
3.0	.265	.141	.042	.259	.139	.042	.248	.134	.041	.237	.130	.040	.227	.126	.039	
4.0	.245	.127	.037	.239	.125	.037	.229	.122	.036	.220	.118	.036	.211	.115	.035	
5.0	.227	.115	.033	.222	.114	.033	.213	.111	.033	.204	.108	.032	.196	.105	.031	
6.0	.210	.105	.030	.206	.104	.030	.198	.101	.029	.190	.099	.029	.183	.096	.029	
7.0	.196	.097	.027	.192	.096	.027	.185	.093	.027	.178	.091	.027	.171	.089	.026	
8.0	.183	.089	.025	.180	.088	.025	.173	.086	.025	.167	.084	.024	.161	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.163	.080	.023	.157	.079	.023	.152	.077	.022	
10.0	.162	.077	.021	.159	.077	.021	.153	.075	.021	.148	.074	.021	.143	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.199	.175	.154	.170	.151	.133	.117	.104	.092	.067	.060	.053	.021	.019	.017	
2.0	.191	.151	.118	.163	.130	.102	.112	.090	.071	.065	.052	.042	.021	.017	.014	
3.0	.183	.134	.094	.157	.115	.082	.108	.080	.057	.062	.047	.034	.020	.015	.011	
4.0	.175	.120	.078	.150	.104	.068	.103	.073	.048	.060	.042	.028	.019	.014	.009	
5.0	.168	.110	.067	.144	.095	.059	.099	.067	.041	.058	.039	.025	.019	.013	.008	
6.0	.161	.102	.059	.138	.088	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
7.0	.154	.095	.053	.132	.082	.046	.092	.058	.033	.053	.034	.020	.017	.011	.006	
8.0	.148	.089	.049	.127	.077	.043	.088	.054	.030	.051	.032	.018	.017	.010	.006	
9.0	.142	.084	.045	.122	.073	.039	.085	.051	.028	.049	.030	.017	.016	.010	.006	
10.0	.136	.080	.042	.117	.069	.037	.081	.049	.026	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.0	26.4	25.3	26.7	26.9	25.6	27.1	25.9	27.3	27.6
3H	26.4	27.8	26.8	28.1	28.4	27.2	28.5	27.5	28.8	29.1
4H	27.0	28.3	27.4	28.6	28.9	27.8	29.1	28.2	29.4	29.7
6H	27.5	28.7	27.8	29.0	29.3	28.3	29.5	28.7	29.8	30.2
8H	27.6	28.8	28.0	29.1	29.5	28.5	29.6	28.8	30.0	30.3
12H	27.7	28.8	28.1	29.2	29.5	28.6	29.7	28.9	30.0	30.4
4H 2H	25.7	27.0	26.0	27.3	27.6	26.2	27.5	26.5	27.8	28.1
3H	27.4	28.5	27.8	28.8	29.2	28.0	29.1	28.4	29.4	29.8
4H	28.1	29.1	28.5	29.5	29.9	28.8	29.8	29.2	30.1	30.5
6H	28.7	29.6	29.1	30.0	30.4	29.4	30.3	29.8	30.7	31.1
8H	28.9	29.7	29.3	30.1	30.6	29.6	30.4	30.0	30.8	31.3
12H	29.0	29.8	29.5	30.2	30.7	29.7	30.5	30.2	30.9	31.4
8H 4H	28.5	29.3	28.9	29.7	30.2	29.0	29.9	29.5	30.3	30.7
6H	29.2	29.9	29.7	30.4	30.8	29.8	30.5	30.3	31.0	31.4
8H	29.5	30.1	30.0	30.6	31.1	30.1	30.7	30.6	31.2	31.7
12H	29.8	30.3	30.3	30.8	31.3	30.4	30.9	30.9	31.4	31.9
12H 4H	28.5	29.3	29.0	29.7	30.2	29.0	29.8	29.5	30.2	30.7
6H	29.3	29.9	29.8	30.4	30.9	29.9	30.5	30.4	31.0	31.5
8H	29.7	30.2	30.2	30.7	31.2	30.2	30.8	30.8	31.3	31.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 10372 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.1)
 Area: 0.09 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	33
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	57	72	65	57	50
1.25	83	73	66	81	72	65	78	70	64	57
1.50	88	78	71	86	77	71	83	75	69	62
2.00	95	86	80	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

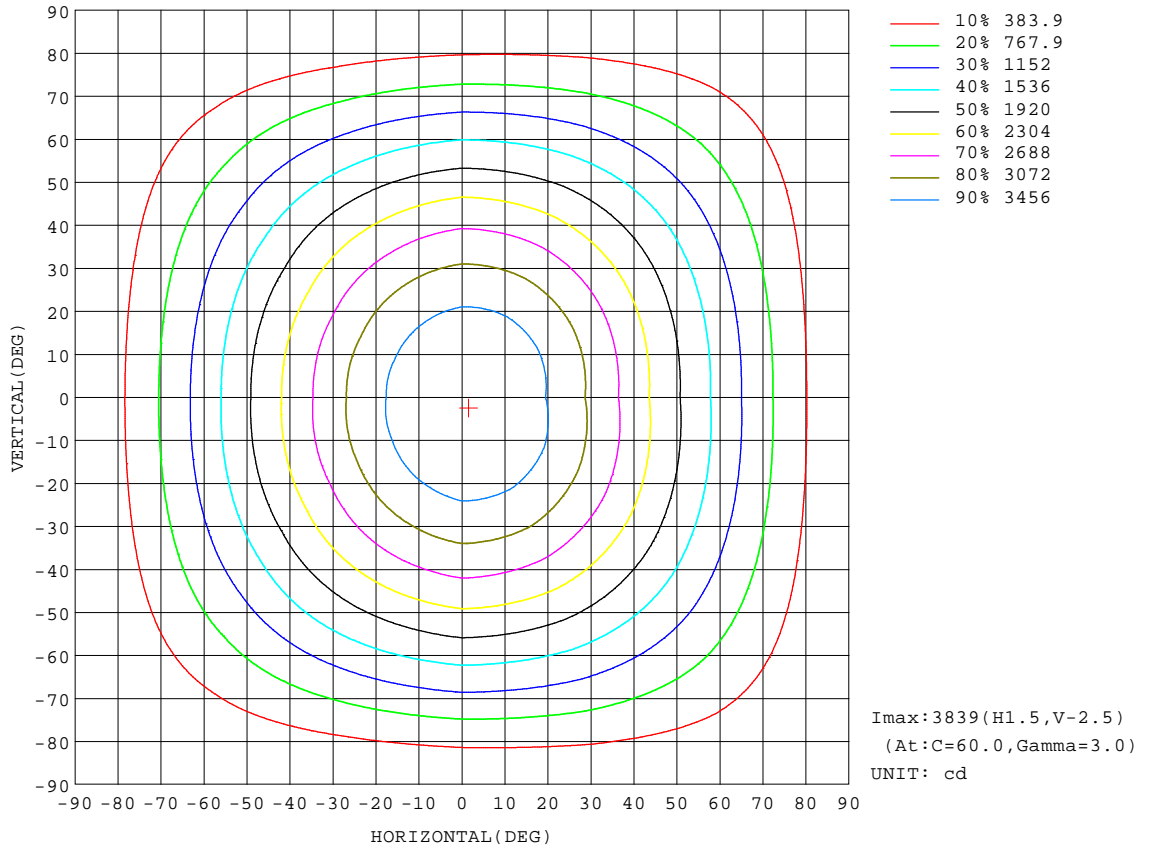


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

Flux out:6637 lm

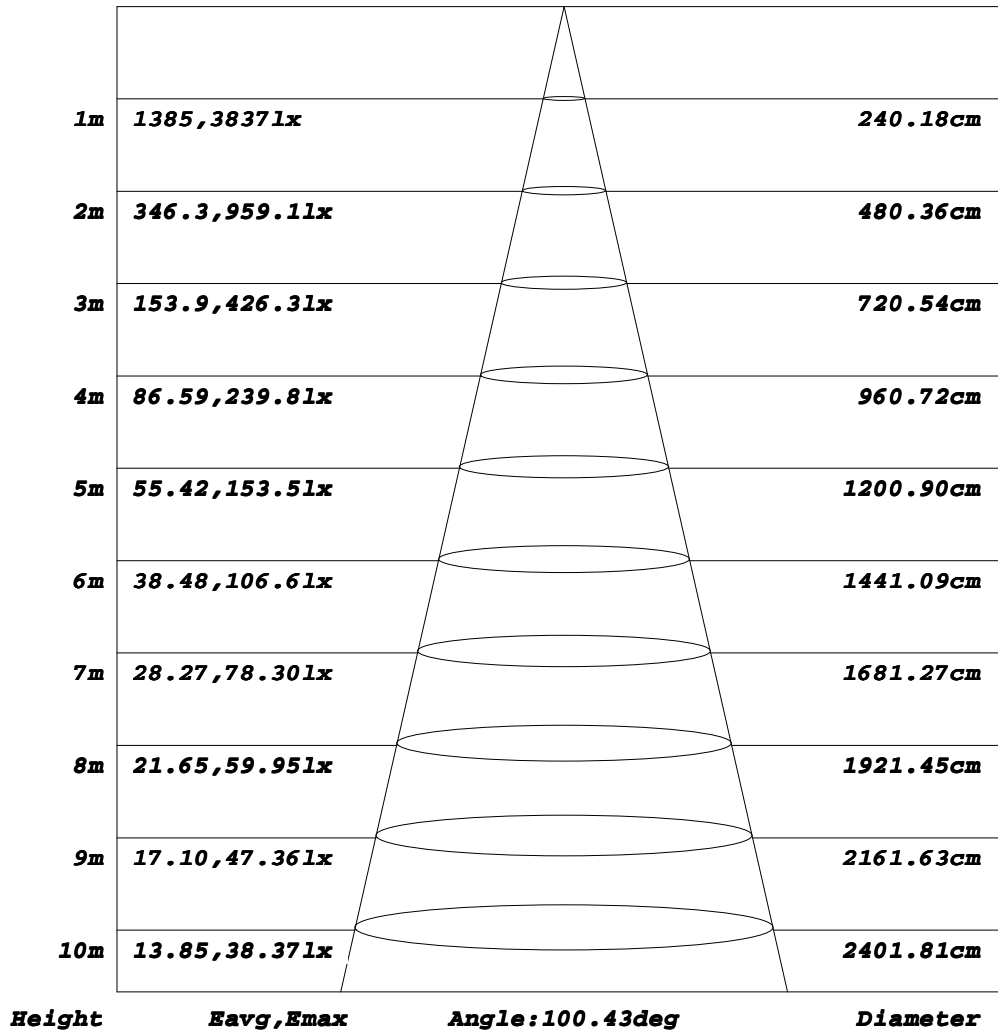


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

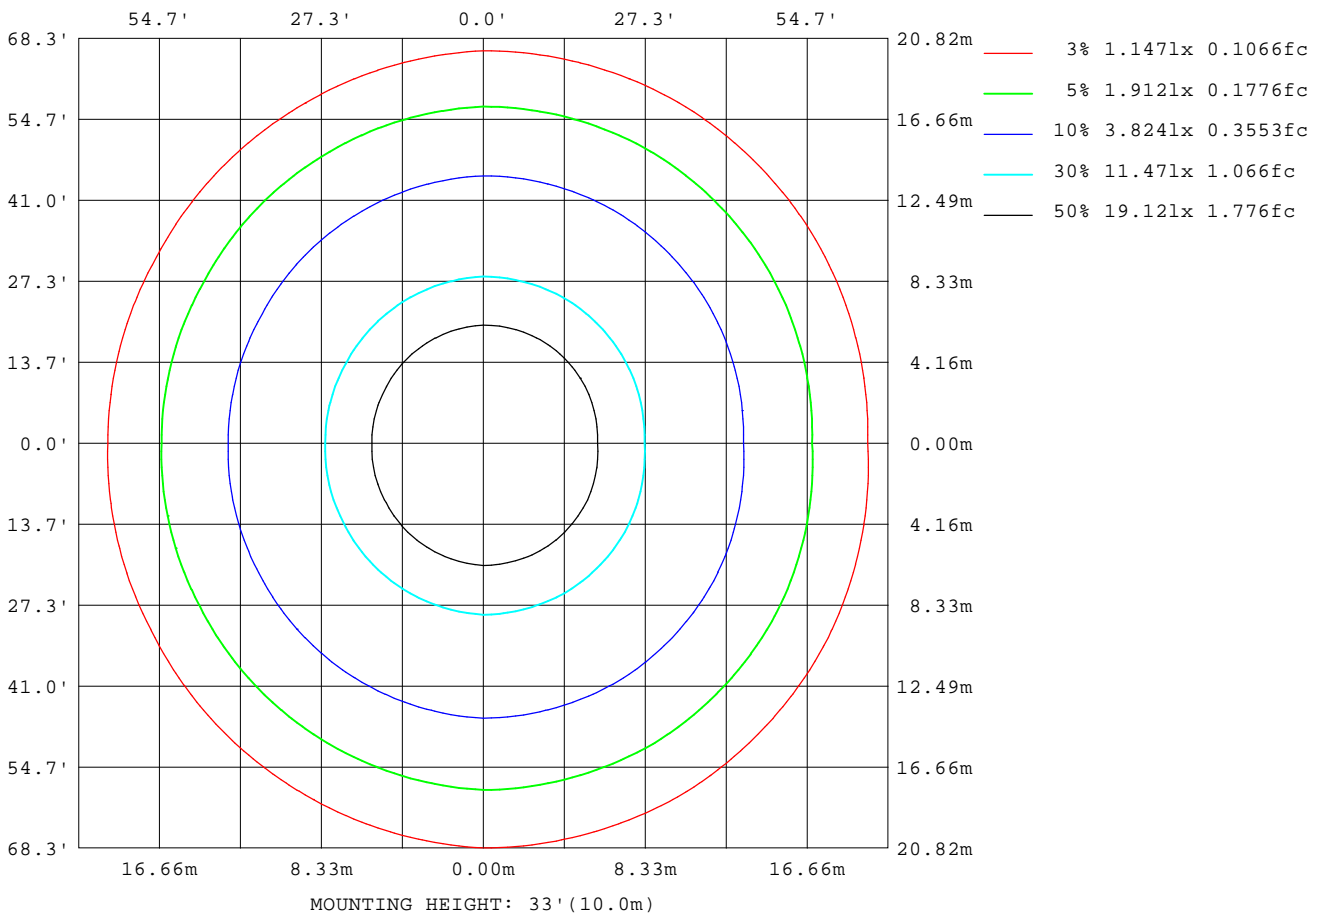

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

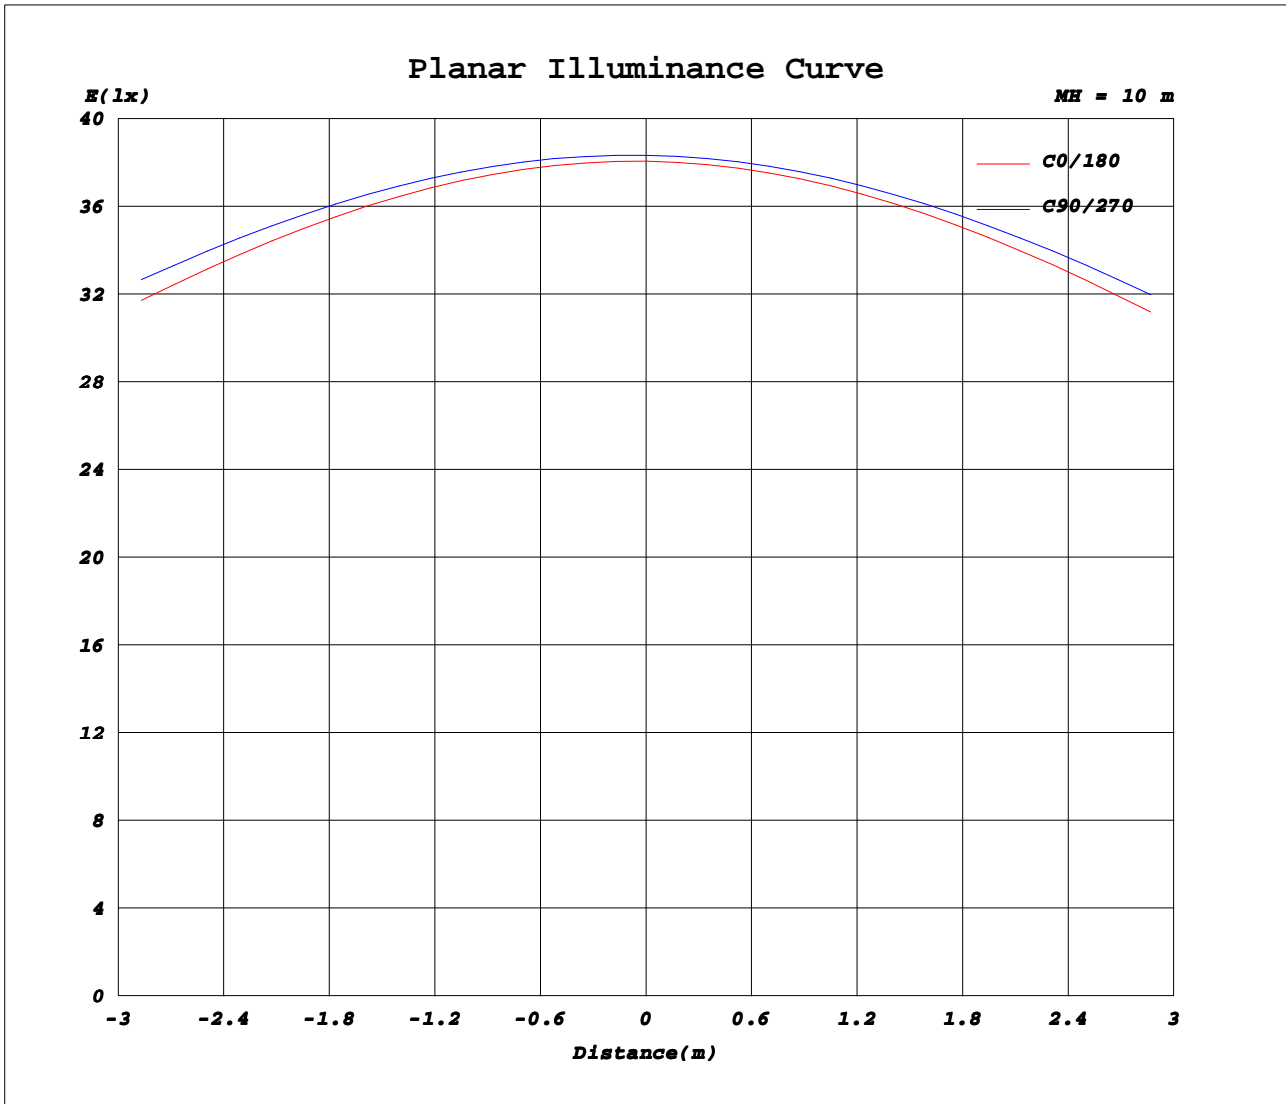

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.3740A P:79.300W PF:0.9680 Freq:50.00Hz		
Lamp Flux:10371.5x1 lm		
Name: NS50-2000MM-80W	Type: LED	
MFR.: Lumega Group	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3806	3827	3835	3833	3833	3821	3806	3823	3835	3833	3833	3825							
5	3789	3824	3834	3826	3811	3789	3769	3778	3792	3801	3811	3808							
10	3720	3772	3791	3781	3748	3709	3681	3686	3707	3732	3746	3743							
15	3600	3673	3706	3698	3643	3583	3544	3552	3586	3626	3642	3633							
20	3436	3532	3582	3581	3502	3417	3367	3379	3429	3488	3500	3482							
25	3235	3355	3422	3427	3327	3220	3156	3173	3240	3316	3323	3293							
30	3006	3146	3229	3242	3123	2995	2920	2942	3023	3113	3115	3076							
35	2758	2912	3009	3028	2895	2751	2669	2692	2785	2888	2883	2834							
40	2498	2659	2765	2792	2645	2492	2409	2430	2531	2648	2633	2575							
45	2226	2391	2501	2529	2377	2219	2134	2158	2261	2379	2366	2307							
50	1961	2117	2227	2260	2103	1947	1870	1886	1987	2110	2093	2035							
55	1688	1842	1947	1975	1820	1667	1592	1608	1703	1818	1809	1758							
60	1418	1559	1654	1677	1535	1394	1321	1330	1415	1524	1522	1480							
65	1152	1279	1361	1374	1237	1110	1054	1058	1130	1227	1236	1207							
70	888	999	1064	1067	945	839	794	788	843	929	948	933							
75	633	731	774	758	659	577	543	528	566	636	666	665							
80	392	464	486	460	384	328	309	291	311	362	401	413							
85	179	229	235	206	152	121	118	98.7	104	138	172	189							
90	33.1	56.1	55.3	38.4	25.8	20.8	23.2	25.6	26.9	28.2	35.7	38.5							
95	18.2	18.9	20.2	21.6	21.3	22.2	24.7	27.1	29.1	30.1	28.4	24.5							
100	20.8	21.2	22.5	24.2	23.9	24.7	27.1	29.6	31.7	32.5	30.7	26.9							
105	23.8	24.0	25.4	27.3	26.9	27.6	29.9	32.6	34.6	35.2	33.5	29.6							
110	27.0	26.9	28.3	30.3	30.1	30.8	33.1	35.8	37.6	37.7	36.1	32.6							
115	30.4	30.0	31.2	33.2	33.4	34.3	36.4	39.3	40.7	40.2	38.8	35.7							
120	34.1	33.3	34.3	36.2	36.8	37.9	39.8	42.9	44.1	42.9	41.6	38.8							
125	37.8	36.6	37.3	39.3	40.4	41.6	43.3	46.5	47.5	45.9	44.4	41.8							
130	41.5	39.9	40.7	42.9	44.2	45.2	46.7	50.1	51.2	49.5	47.6	44.9							
135	45.1	43.4	44.3	46.8	48.0	48.8	50.0	53.5	54.9	53.4	51.0	48.1							
140	48.6	47.0	48.2	50.9	51.9	52.3	53.1	56.7	58.6	57.5	54.6	51.4							
145	51.9	50.7	52.1	54.8	55.7	55.7	56.0	59.8	62.2	61.5	58.1	54.6							
150	55.5	54.5	56.1	59.0	59.6	59.1	58.9	62.8	65.3	64.8	61.5	58.0							
155	59.2	58.6	60.4	63.2	63.4	62.4	61.8	65.6	68.3	68.1	64.6	61.3							
160	62.9	62.8	64.6	67.0	67.0	65.7	64.8	68.2	70.9	70.9	67.5	64.5							
165	66.7	66.9	68.5	70.4	70.2	68.7	67.6	70.6	73.0	73.1	70.1	67.6							
170	70.1	70.5	71.8	73.3	72.9	71.3	70.1	72.4	74.5	74.8	72.4	70.4							
175	72.4	73.2	74.4	75.4	74.8	73.3	71.9	73.7	75.5	75.9	74.1	72.6							
180	72.9	74.5	75.7	76.3	75.2	73.8	73.0	74.3	75.7	76.4	75.3	73.9							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: