
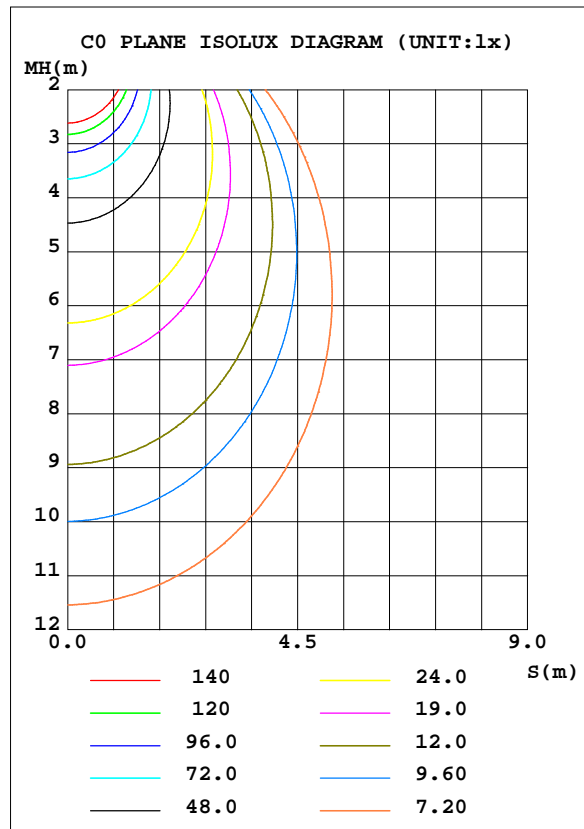


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.82 lm/W			
MODEL		I _{max} (cd)	959.3	S/MH(C0/180)	1.15
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2521.4	η UP, DN(C0-180)	1.2, 48.2
NOMINAL FLUX(lm)	2521.37	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3, 49.3
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.35

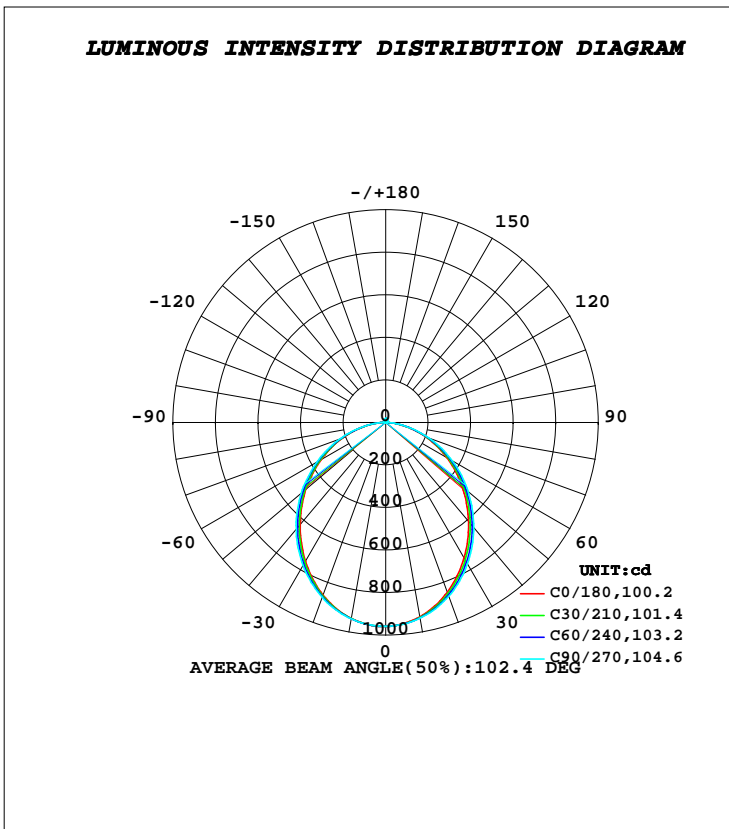

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	927.6	931.9	934.3	933.8	935.1	936.3	937.4	932.1	0- 10	90.30	90.30	3.58,3.58
20	848.9	859.8	869.2	863.9	863.1	869.1	874.6	862.5	10- 20	254.7	345.0	13.7,13.7
30	736.8	754.0	768.3	758.8	754.3	765.7	777.8	758.1	20- 30	375.2	720.2	28.6,28.6
40	606.8	626.8	644.3	631.3	624.9	639.2	654.0	631.2	30- 40	436.3	1156	45.9,45.9
50	470.7	489.5	506.8	494.1	491.1	503.0	519.9	495.0	40- 50	435.6	1592	63.1,63.1
60	334.0	348.3	362.8	352.4	350.7	361.7	374.4	355.0	50- 60	380.0	1972	78.2,78.2
70	200.9	210.4	219.0	214.8	216.6	223.6	231.2	218.0	60- 70	282.5	2255	89.4,89.4
80	78.32	82.14	83.18	86.64	93.10	94.27	96.34	89.80	70- 80	159.0	2414	95.7,95.7
90	4.224	4.974	4.883	5.551	7.677	8.093	8.371	7.150	80- 90	42.93	2457	97.4,97.4
100	5.330	5.421	5.544	5.546	6.583	6.800	6.889	6.713	90-100	6.174	2463	97.7,97.7
110	7.088	7.220	7.472	7.329	8.242	8.472	8.657	8.370	100-110	7.354	2470	98,98
120	9.059	9.206	9.537	9.294	10.08	10.36	10.61	10.24	110-120	8.731	2479	98.3,98.3
130	11.10	11.24	11.59	11.31	11.99	12.26	12.52	12.12	120-130	9.648	2488	98.7,98.7
140	13.00	13.19	13.48	13.21	13.76	14.02	14.27	13.91	130-140	9.805	2498	99.1,99.1
150	14.78	14.99	15.22	14.96	15.29	15.57	15.79	15.48	140-150	9.050	2507	99.4,99.4
160	16.60	16.70	16.85	16.62	16.77	16.94	17.11	16.86	150-160	7.402	2515	99.7,99.7
170	18.25	18.14	18.22	18.05	18.14	18.07	18.15	18.00	160-170	4.935	2520	99.9,99.9
180	18.87	18.77	18.78	18.70	18.88	18.78	18.78	18.68	170-180	1.759	2521	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

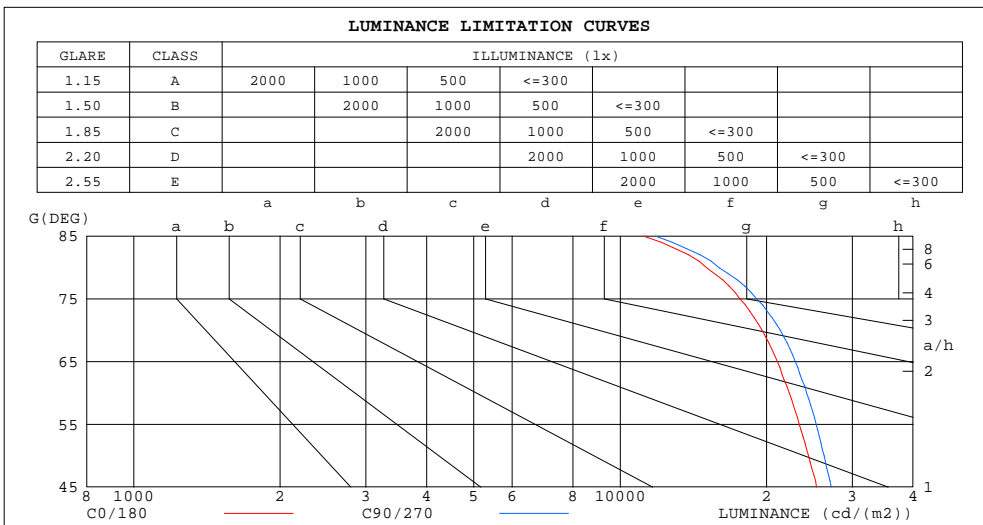


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.04	.00	.96	1.01	.97	.94	.97	.93	.91	.92	.90	.87	.88	.86	.84	.82
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.71	.62	.56	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.49	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.33	.42	.37	.32	.30
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.36	.31	.27	.25

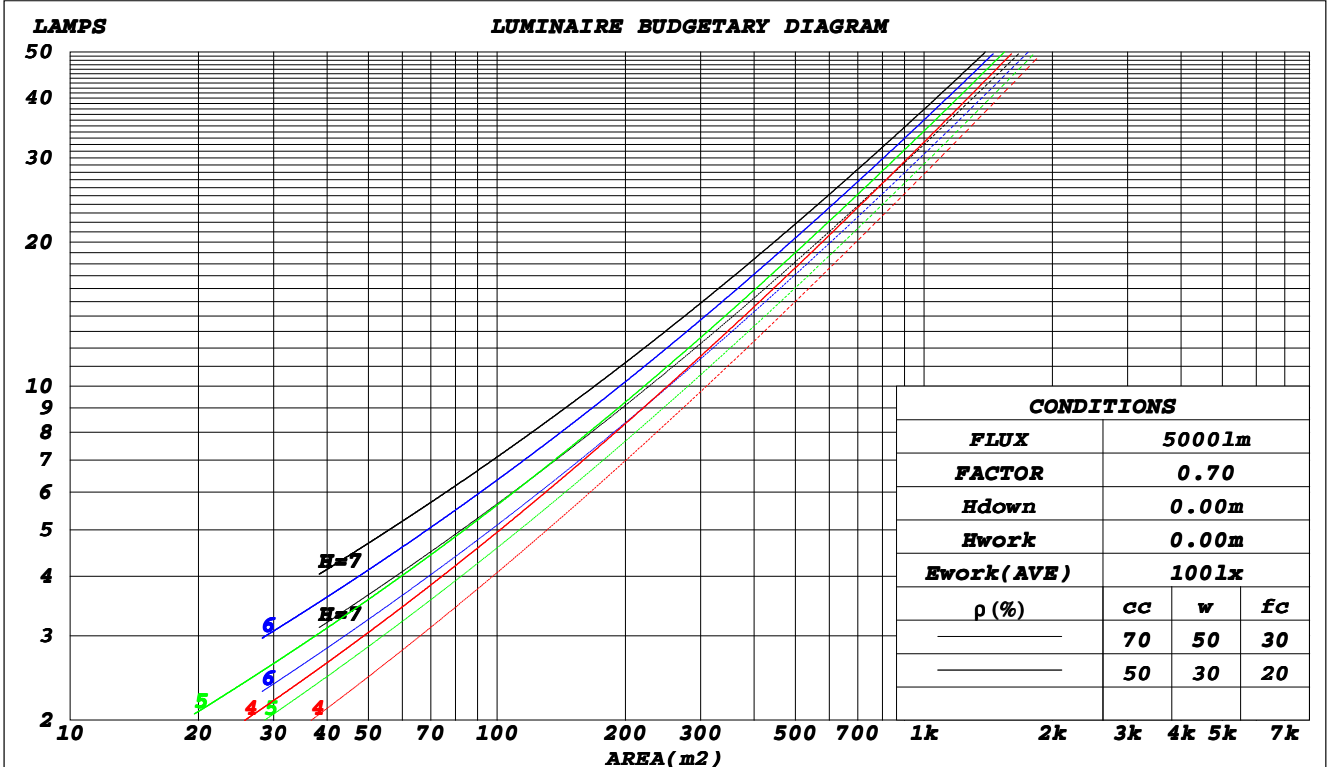

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.171	.054	.293	.167	.053	.278	.159	.051	.264	.153	.049	.252	.146	.047	
2.0	.283	.155	.048	.276	.152	.047	.263	.146	.045	.251	.141	.044	.240	.136	.043	
3.0	.263	.140	.042	.256	.137	.041	.245	.133	.040	.234	.128	.039	.224	.124	.038	
4.0	.243	.126	.037	.237	.124	.037	.227	.120	.036	.218	.117	.035	.209	.113	.035	
5.0	.225	.115	.033	.220	.113	.033	.211	.110	.032	.202	.107	.032	.194	.104	.031	
6.0	.209	.105	.030	.205	.103	.030	.196	.101	.029	.189	.098	.029	.182	.096	.028	
7.0	.195	.096	.027	.191	.095	.027	.183	.093	.027	.177	.090	.026	.170	.088	.026	
8.0	.182	.089	.025	.179	.088	.025	.172	.086	.025	.166	.084	.024	.160	.082	.024	
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.161	.077	.021	.158	.076	.021	.152	.075	.021	.147	.073	.021	.142	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.180	.180	.180	.123	.123	.123	.070	.070	.070	.023	.023	.023	
1.0	.199	.176	.155	.171	.151	.133	.117	.104	.092	.067	.060	.054	.022	.019	.017	
2.0	.191	.152	.119	.164	.131	.103	.112	.090	.072	.065	.053	.042	.021	.017	.014	
3.0	.183	.134	.095	.157	.116	.083	.108	.080	.058	.062	.047	.034	.020	.015	.011	
4.0	.175	.121	.079	.150	.104	.069	.103	.073	.049	.060	.043	.029	.019	.014	.009	
5.0	.168	.111	.068	.144	.096	.059	.099	.067	.042	.058	.039	.025	.019	.013	.008	
6.0	.161	.102	.060	.138	.088	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
7.0	.154	.095	.054	.133	.083	.047	.092	.058	.033	.053	.034	.020	.017	.011	.007	
8.0	.148	.089	.049	.127	.078	.043	.088	.055	.031	.051	.032	.018	.017	.011	.006	
9.0	.142	.085	.046	.122	.073	.040	.085	.052	.028	.049	.030	.017	.016	.010	.006	
10.0	.136	.080	.043	.117	.070	.038	.081	.049	.027	.048	.029	.016	.015	.010	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	24.9	23.8	25.2	25.4	23.8	25.2	24.1	25.5	25.7
3H	24.8	26.2	25.2	26.4	26.7	25.2	26.5	25.5	26.8	27.1
4H	25.3	26.6	25.7	26.9	27.2	25.7	27.0	26.1	27.3	27.6
6H	25.7	26.9	26.1	27.2	27.5	26.1	27.3	26.5	27.6	27.9
8H	25.8	26.9	26.2	27.3	27.6	26.2	27.3	26.6	27.7	28.0
12H	25.8	26.9	26.2	27.3	27.6	26.2	27.3	26.6	27.7	28.0
4H 2H	24.1	25.3	24.4	25.6	25.9	24.3	25.6	24.7	25.9	26.2
3H	25.6	26.7	26.0	27.1	27.4	25.9	27.0	26.3	27.4	27.7
4H	26.2	27.3	26.7	27.6	28.0	26.6	27.6	27.0	27.9	28.3
6H	26.7	27.6	27.1	28.0	28.4	27.0	27.9	27.5	28.3	28.7
8H	26.8	27.7	27.3	28.1	28.5	27.2	28.0	27.6	28.4	28.9
12H	26.9	27.7	27.4	28.1	28.6	27.2	28.0	27.7	28.4	28.9
8H 4H	26.5	27.3	26.9	27.7	28.2	26.8	27.6	27.2	28.0	28.5
6H	27.1	27.8	27.6	28.2	28.7	27.4	28.1	27.8	28.5	29.0
8H	27.3	27.9	27.8	28.4	28.9	27.6	28.2	28.1	28.7	29.2
12H	27.4	27.9	27.9	28.4	29.0	27.7	28.2	28.2	28.7	29.2
12H 4H	26.5	27.3	27.0	27.7	28.1	26.8	27.5	27.2	28.0	28.4
6H	27.1	27.7	27.6	28.2	28.7	27.4	28.0	27.9	28.5	29.0
8H	27.4	27.9	27.9	28.4	28.9	27.6	28.2	28.2	28.7	29.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2521 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.2)
 Area: 0.03 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	57	47	40	56	46	40	33
0.80	68	57	50	67	56	49	65	55	49	42
1.00	76	66	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	86	78	71	83	76	70	62
2.00	95	87	80	93	85	79	89	83	78	69
2.50	99	91	85	97	90	84	92	87	82	73
3.00	102	95	90	100	94	89	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	100	106	101	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

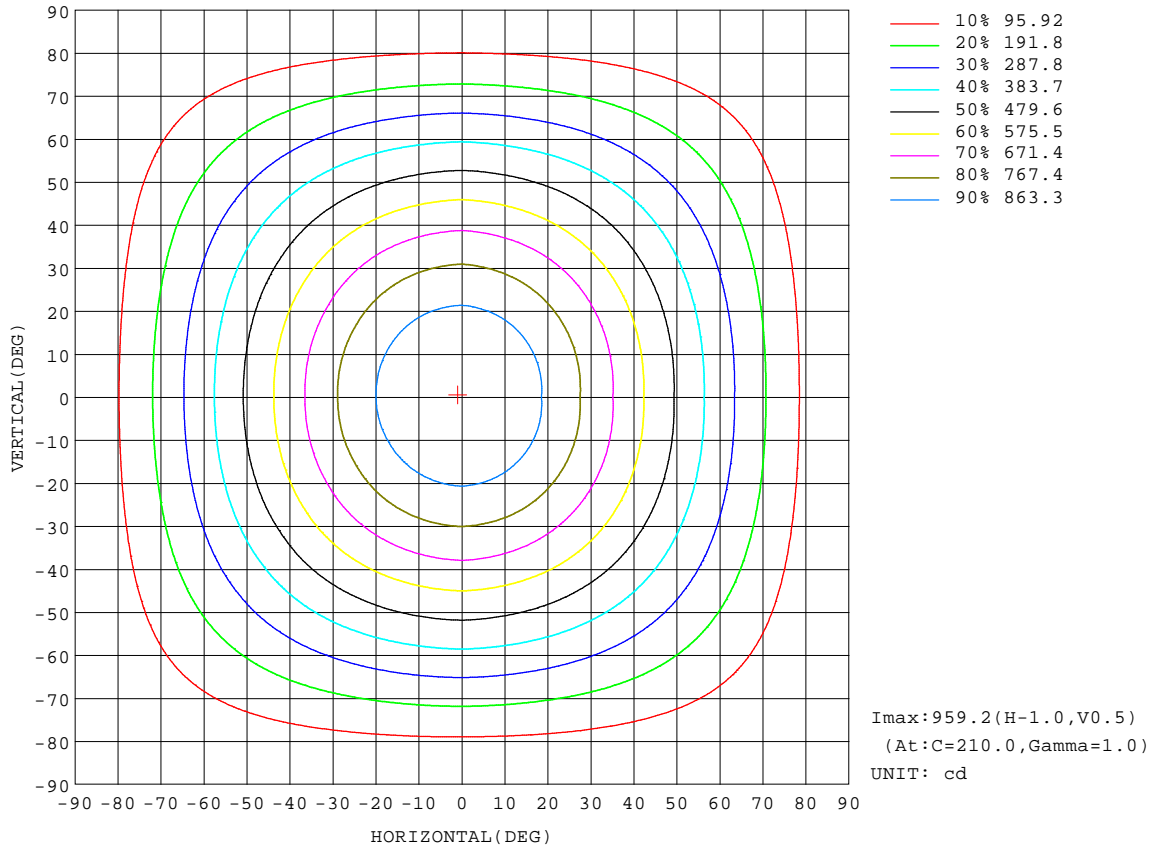


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

Flux out:1633 lm

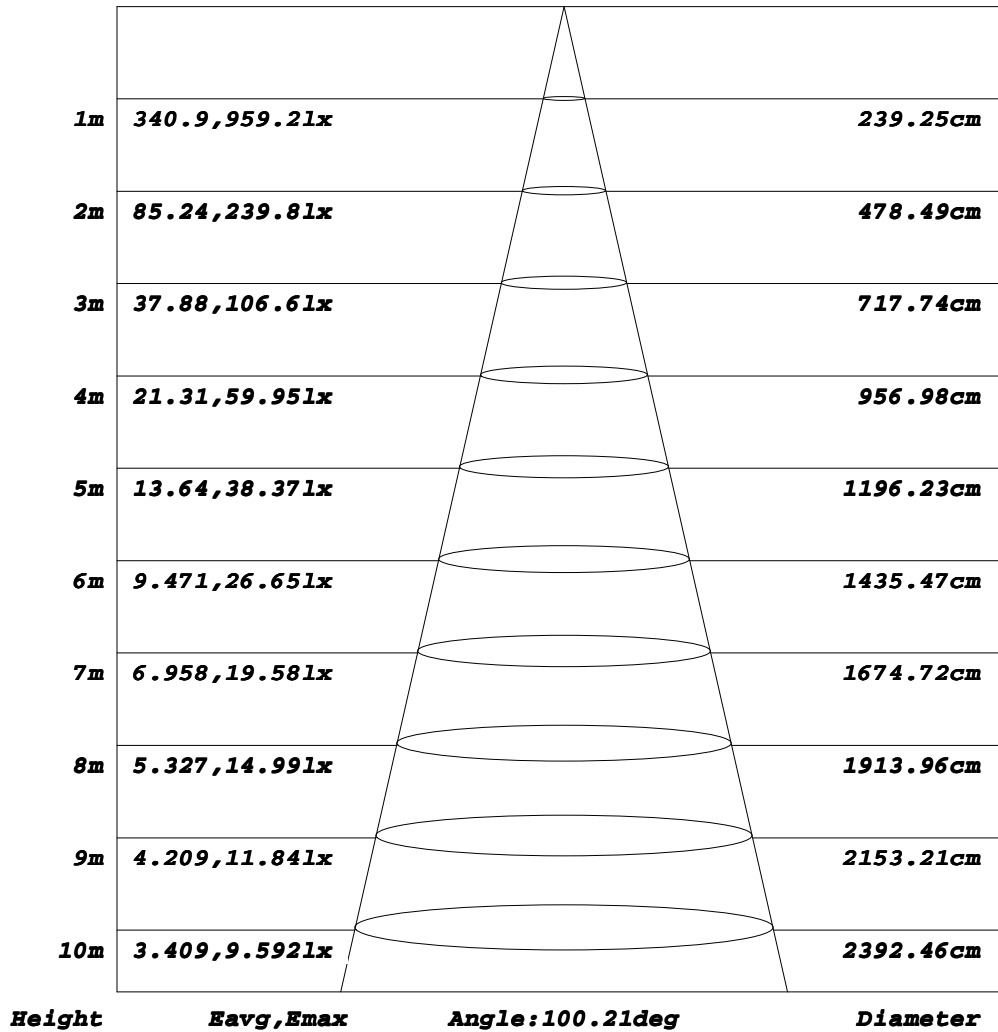


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz		
Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

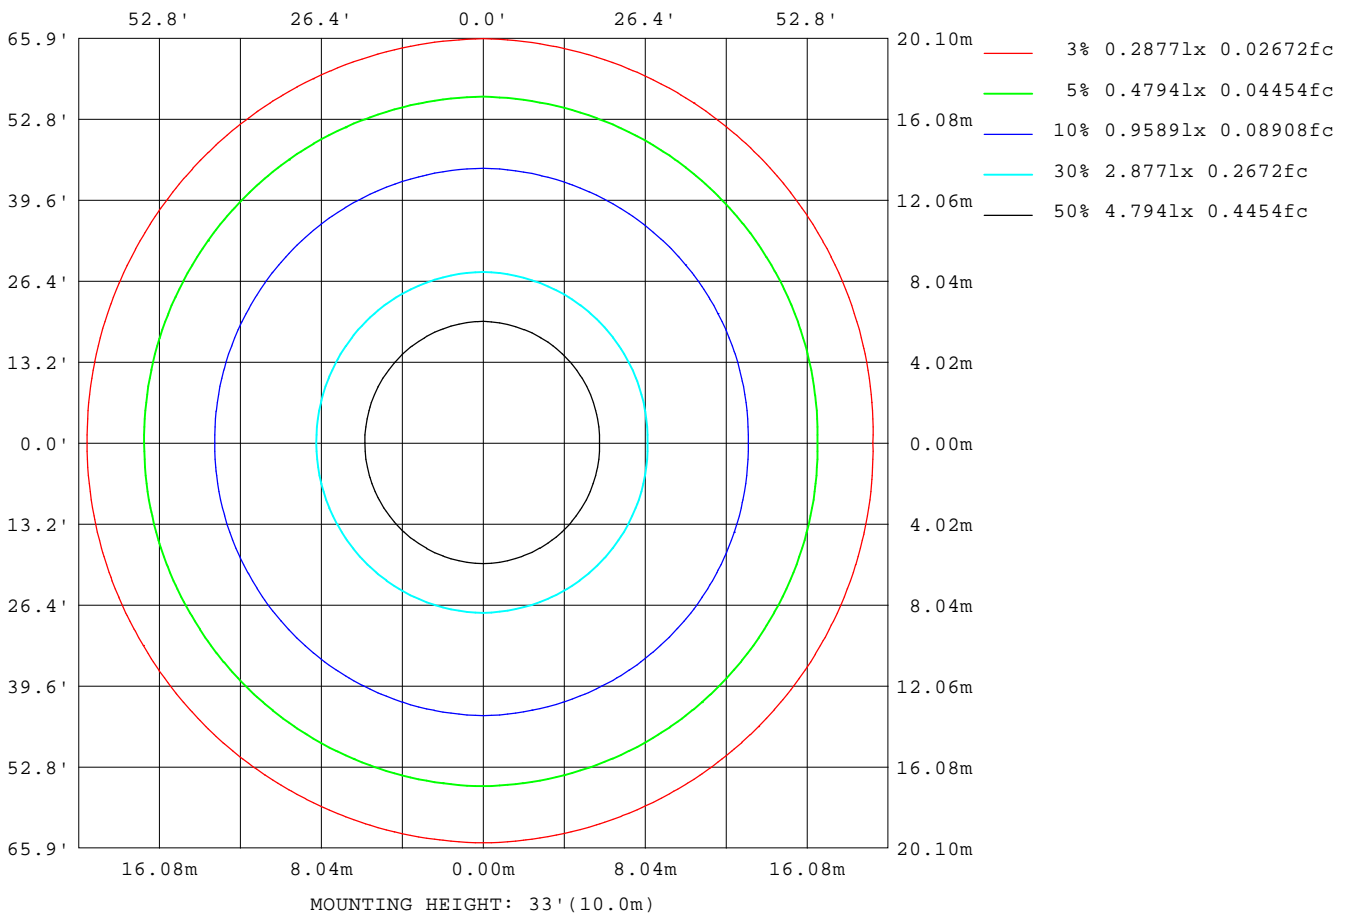

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

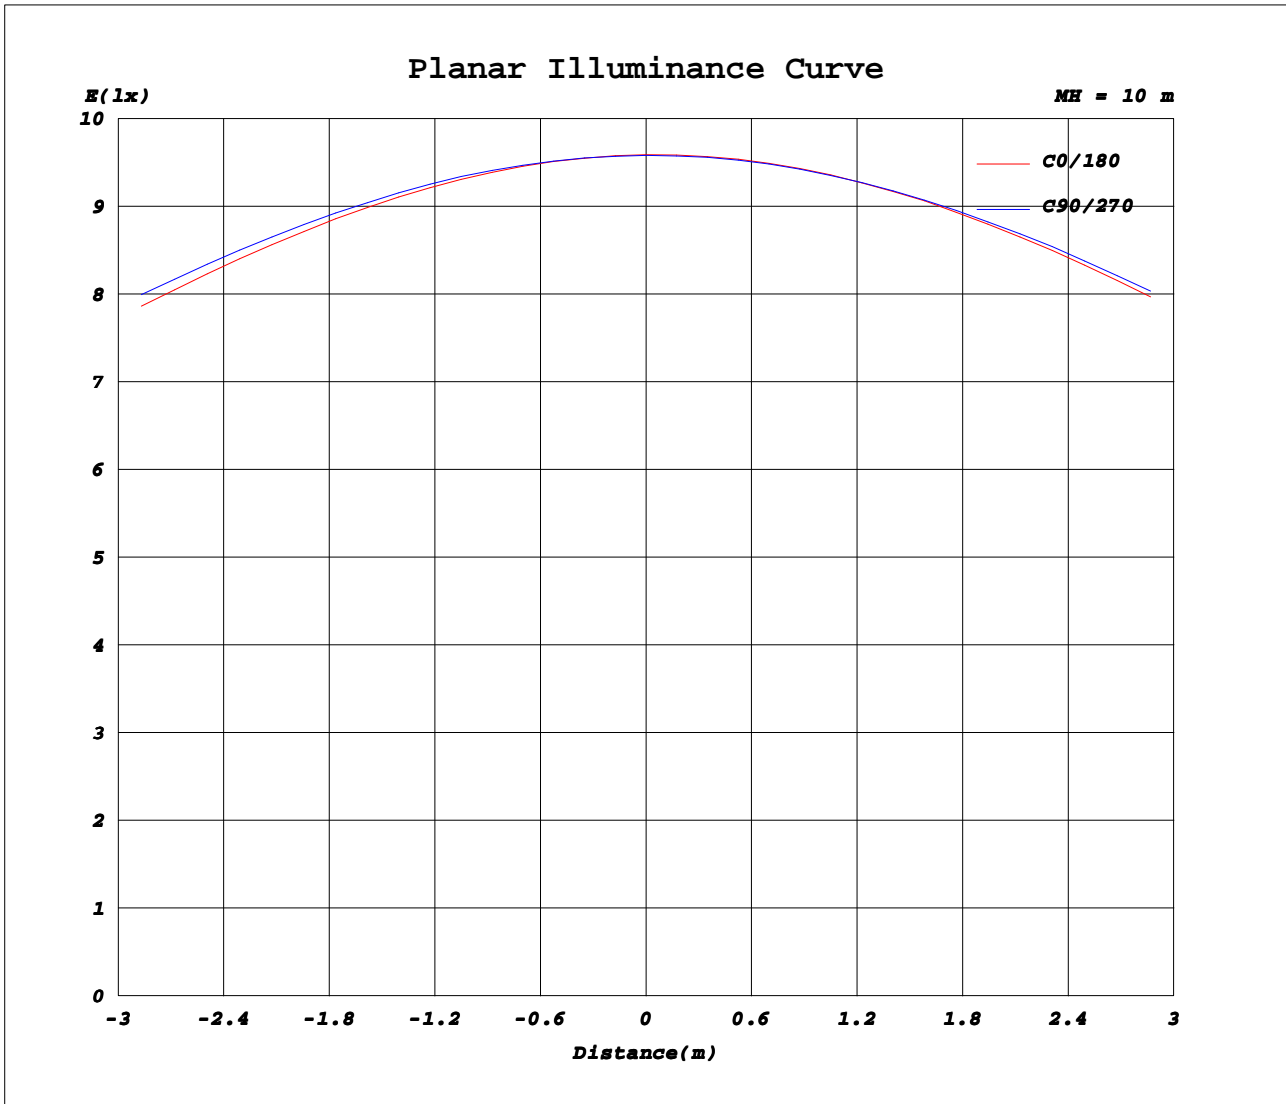

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.0960A P:20.200W PF:0.9550 Freq:50.00Hz Lamp Flux:2521.37x1 lm		
Name: NS50-600MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: 600*50*75mm	
	SUR.: 595*45mm	

Table--1

UNIT: cd

C(DEG)\ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330								
0	959	959	959	958	958	958	959	959	959	958	958	958								
5	950	951	952	952	952	953	954	954	954	953	952	951								
10	928	931	933	934	934	934	935	936	937	937	934	930								
15	893	898	903	906	905	904	905	906	909	911	906	899								
20	849	856	864	869	865	862	863	867	872	875	867	858								
25	796	806	815	822	817	812	812	817	825	830	820	808								
30	737	748	760	768	762	755	754	761	771	778	766	750								
35	673	686	699	709	702	694	691	698	710	719	705	688								
40	607	620	634	644	636	627	625	633	645	654	640	622								
45	537	551	566	576	568	559	558	565	578	589	573	554								
50	471	483	496	507	498	490	491	497	509	520	504	486								
55	402	413	425	435	426	419	419	426	438	446	433	417								
60	334	343	354	363	355	349	351	357	367	374	363	347								
65	267	273	283	291	285	281	283	289	297	303	293	280								
70	201	207	214	219	216	214	217	221	227	231	223	212								
75	137	142	146	148	147	149	153	155	158	162	156	147								
80	78.3	81.5	82.8	83.2	84.8	88.5	93.1	93.7	94.9	96.3	92.9	86.7								
85	29.2	30.9	31.2	31.0	32.2	35.9	40.5	40.6	40.5	40.7	39.1	35.4								
90	4.22	4.91	5.04	4.88	5.02	6.08	7.68	7.99	8.19	8.37	7.83	6.47								
95	4.60	4.67	4.78	4.87	4.65	5.02	5.90	6.18	6.37	6.53	6.47	5.87								
100	5.33	5.38	5.47	5.54	5.36	5.74	6.58	6.77	6.83	6.89	6.94	6.48								
105	6.18	6.22	6.35	6.48	6.25	6.57	7.38	7.56	7.64	7.74	7.74	7.27								
110	7.09	7.14	7.30	7.47	7.19	7.46	8.24	8.41	8.53	8.66	8.61	8.13								
115	8.05	8.08	8.28	8.49	8.17	8.39	9.14	9.32	9.46	9.61	9.53	9.04								
120	9.06	9.10	9.31	9.54	9.21	9.38	10.1	10.3	10.4	10.6	10.5	9.99								
125	10.1	10.1	10.3	10.6	10.2	10.4	11.0	11.2	11.4	11.6	11.4	10.9								
130	11.1	11.1	11.4	11.6	11.3	11.4	12.0	12.2	12.3	12.5	12.4	11.9								
135	12.1	12.1	12.3	12.6	12.2	12.3	12.9	13.1	13.3	13.4	13.3	12.8								
140	13.0	13.1	13.3	13.5	13.2	13.3	13.8	13.9	14.1	14.3	14.1	13.7								
145	13.9	14.0	14.2	14.4	14.1	14.1	14.6	14.7	14.9	15.1	14.9	14.5								
150	14.8	14.9	15.1	15.2	15.0	15.0	15.3	15.5	15.7	15.8	15.7	15.3								
155	15.7	15.8	15.9	16.1	15.8	15.8	16.0	16.2	16.4	16.5	16.3	16.1								
160	16.6	16.6	16.8	16.9	16.6	16.6	16.8	16.9	17.0	17.1	17.0	16.8								
165	17.5	17.4	17.5	17.6	17.4	17.4	17.5	17.5	17.6	17.7	17.5	17.4								
170	18.2	18.1	18.2	18.2	18.1	18.0	18.1	18.1	18.1	18.1	18.0	18.0								
175	18.8	18.7	18.7	18.7	18.6	18.6	18.6	18.5	18.5	18.5	18.4	18.4								
180	18.9	18.8	18.8	18.8	18.7	18.7	18.9	18.8	18.8	18.8	18.7	18.7								

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: