
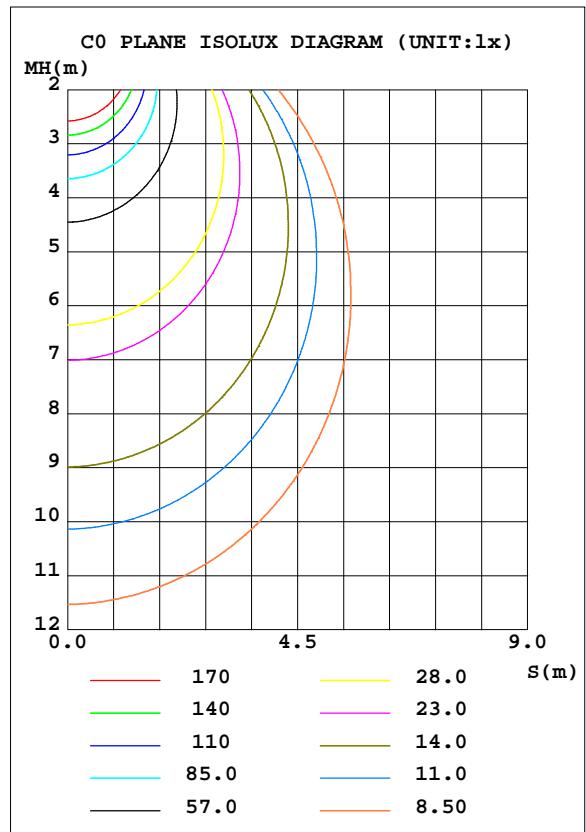


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.63 lm/W			
MODEL		I _{max} (cd)	1131	S/MH(C0/180)	1.24
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3348.2	η UP, DN(C0-180)	1.1,46.8
NOMINAL FLUX(lm)	3348.24	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,51.0
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.8	CIBSE SHR MAX	1.35

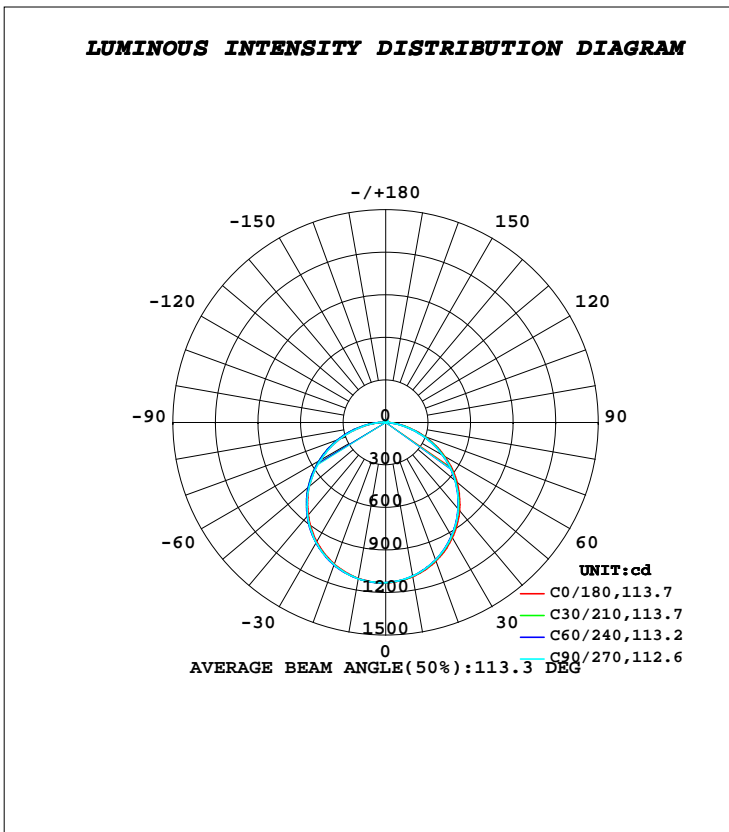

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1104	1100	1100	1106	1116	1119	1119	1112	0- 10	106.9	106.9	3.19,3.19
20	1040	1032	1032	1044	1062	1068	1068	1056	10- 20	306.1	413.0	12.3,12.3
30	940.1	929.0	928.4	946.9	972.3	981.1	980.2	964.4	20- 30	464.0	877.0	26.2,26.2
40	811.4	797.6	796.5	819.3	850.0	860.6	857.0	840.6	30- 40	560.4	1437	42.9,42.9
50	659.0	642.6	641.7	667.3	704.3	714.3	706.0	691.8	40- 50	583.4	2021	60.4,60.4
60	483.6	468.6	466.1	495.6	533.2	544.8	531.0	519.3	50- 60	531.1	2552	76.2,76.2
70	296.8	284.1	278.9	311.9	347.0	361.4	345.9	334.8	60- 70	410.0	2962	88.5,88.5
80	112.2	104.5	97.34	128.0	159.0	174.7	160.3	151.0	70- 80	240.0	3202	95.6,95.6
90	6.407	6.789	6.571	7.731	15.52	24.95	24.60	14.28	80- 90	71.66	3273	97.8,97.8
100	8.134	8.173	8.051	8.177	9.507	9.348	9.186	9.333	90-100	9.293	3283	98,98
110	9.635	9.694	9.685	9.640	10.92	10.83	10.74	10.80	100-110	10.06	3293	98.3,98.3
120	10.95	11.05	11.08	11.00	12.18	12.11	12.05	12.09	110-120	10.82	3304	98.7,98.7
130	12.28	12.37	12.44	12.35	13.46	13.38	13.35	13.32	120-130	10.95	3315	99,99
140	13.63	13.72	13.77	13.70	14.64	14.58	14.54	14.50	130-140	10.44	3325	99.3,99.3
150	15.06	15.15	15.24	15.11	15.73	15.74	15.67	15.67	140-150	9.262	3334	99.6,99.6
160	16.47	16.51	16.72	16.43	16.89	16.87	16.87	16.77	150-160	7.420	3342	99.8,99.8
170	17.25	17.39	17.47	17.32	17.59	17.58	17.51	17.49	160-170	4.839	3347	99.9,99.9
180	17.61	17.69	17.70	17.66	17.61	17.68	17.70	17.66	170-180	1.680	3348	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

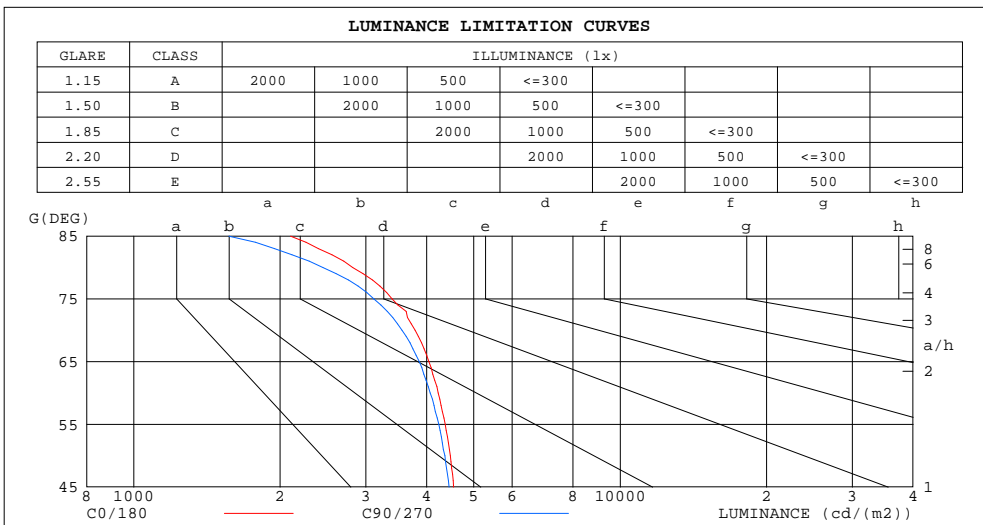

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2101	1569
80	2821	2448
75	3400	3116
70	3789	3561
65	4047	3864
60	4223	4071
55	4366	4236
50	4477	4360
45	4548	4448


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.67
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.70	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.44	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

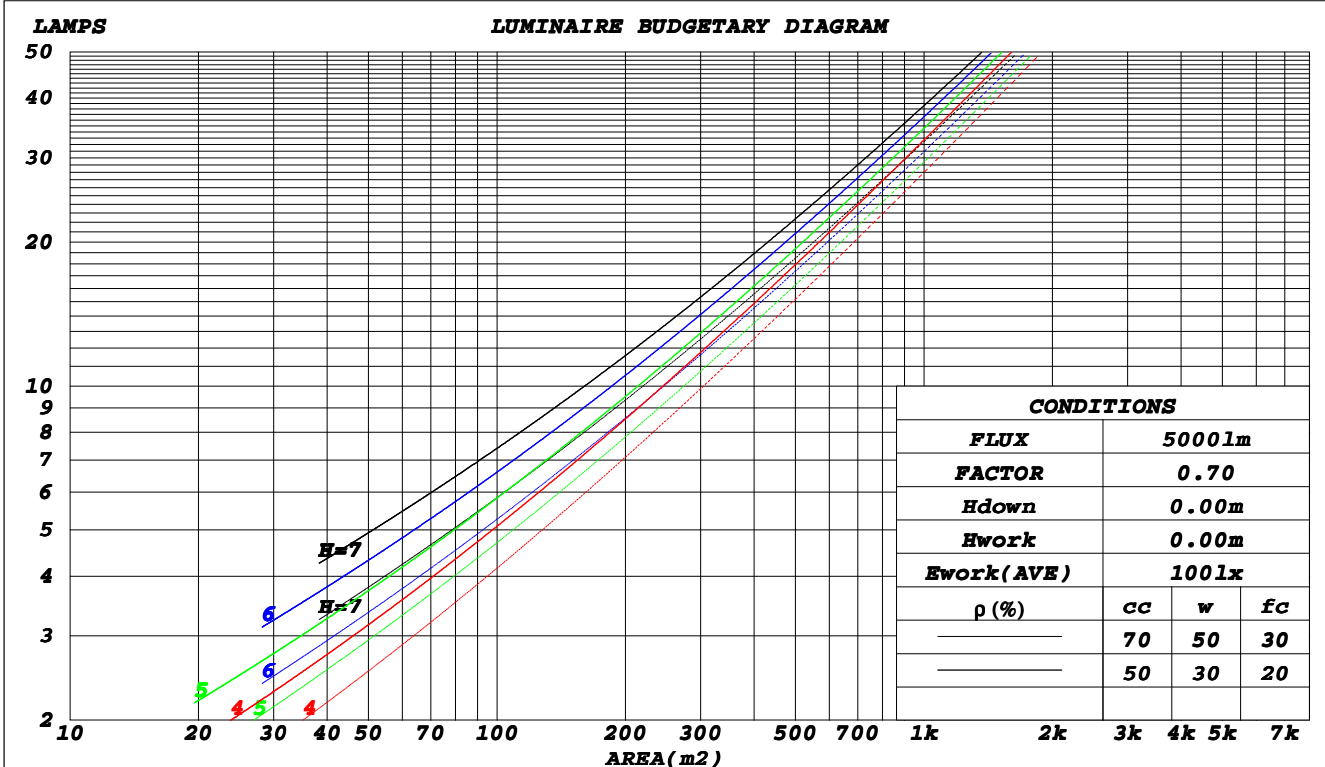

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.179	.057	.306	.175	.055	.292	.167	.053	.278	.161	.052	.266	.154	.050	
2.0	.294	.161	.049	.287	.158	.049	.274	.153	.047	.262	.147	.046	.251	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.254	.138	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.245	.128	.038	.235	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.209	.110	.033	.201	.107	.032	
6.0	.214	.107	.031	.210	.106	.030	.202	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	
9.0	.174	.084	.024	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.173	.151	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.163	.128	.099	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.091	.156	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.175	.118	.076	.150	.102	.066	.103	.071	.046	.060	.042	.027	.019	.014	.009	
5.0	.167	.108	.065	.144	.094	.056	.099	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.137	.086	.049	.095	.060	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.044	.091	.056	.031	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.082	.043	.121	.071	.037	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.7	19.2	18.0	19.4	19.6	17.5	19.0	17.8	19.3	19.5
3H	19.1	20.5	19.5	20.8	21.1	18.9	20.3	19.3	20.6	20.9
4H	19.7	21.0	20.0	21.3	21.6	19.4	20.8	19.8	21.0	21.4
6H	20.0	21.3	20.4	21.6	21.9	19.7	21.0	20.1	21.3	21.6
8H	20.1	21.3	20.5	21.7	22.0	19.8	21.0	20.2	21.3	21.7
12H	20.2	21.3	20.6	21.7	22.0	19.8	21.0	20.2	21.3	21.6
4H 2H	18.2	19.5	18.6	19.8	20.1	18.1	19.4	18.5	19.7	20.0
3H	19.9	21.0	20.2	21.3	21.7	19.7	20.8	20.1	21.2	21.5
4H	20.5	21.6	20.9	21.9	22.3	20.3	21.4	20.7	21.7	22.1
6H	21.0	21.9	21.4	22.3	22.7	20.7	21.6	21.1	22.0	22.4
8H	21.1	22.0	21.6	22.4	22.8	20.8	21.7	21.2	22.1	22.5
12H	21.2	22.0	21.7	22.4	22.9	20.8	21.6	21.3	22.1	22.5
8H 4H	20.7	21.6	21.2	22.0	22.4	20.5	21.4	21.0	21.8	22.2
6H	21.3	22.0	21.8	22.5	23.0	21.0	21.8	21.5	22.2	22.7
8H	21.5	22.2	22.0	22.6	23.1	21.2	21.8	21.7	22.3	22.8
12H	21.6	22.2	22.1	22.7	23.2	21.3	21.8	21.8	22.3	22.8
12H 4H	20.7	21.5	21.2	21.9	22.4	20.5	21.3	21.0	21.7	22.2
6H	21.3	22.0	21.8	22.4	22.9	21.1	21.7	21.6	22.2	22.7
8H	21.6	22.1	22.1	22.6	23.1	21.3	21.8	21.8	22.3	22.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				

CIE Pub.117, 3348 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.2)
Area: 0.229 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	56	45	38	54	44	37	31
0.80	66	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	70	64	77	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	91	85	81	72
3.00	101	94	89	99	93	87	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

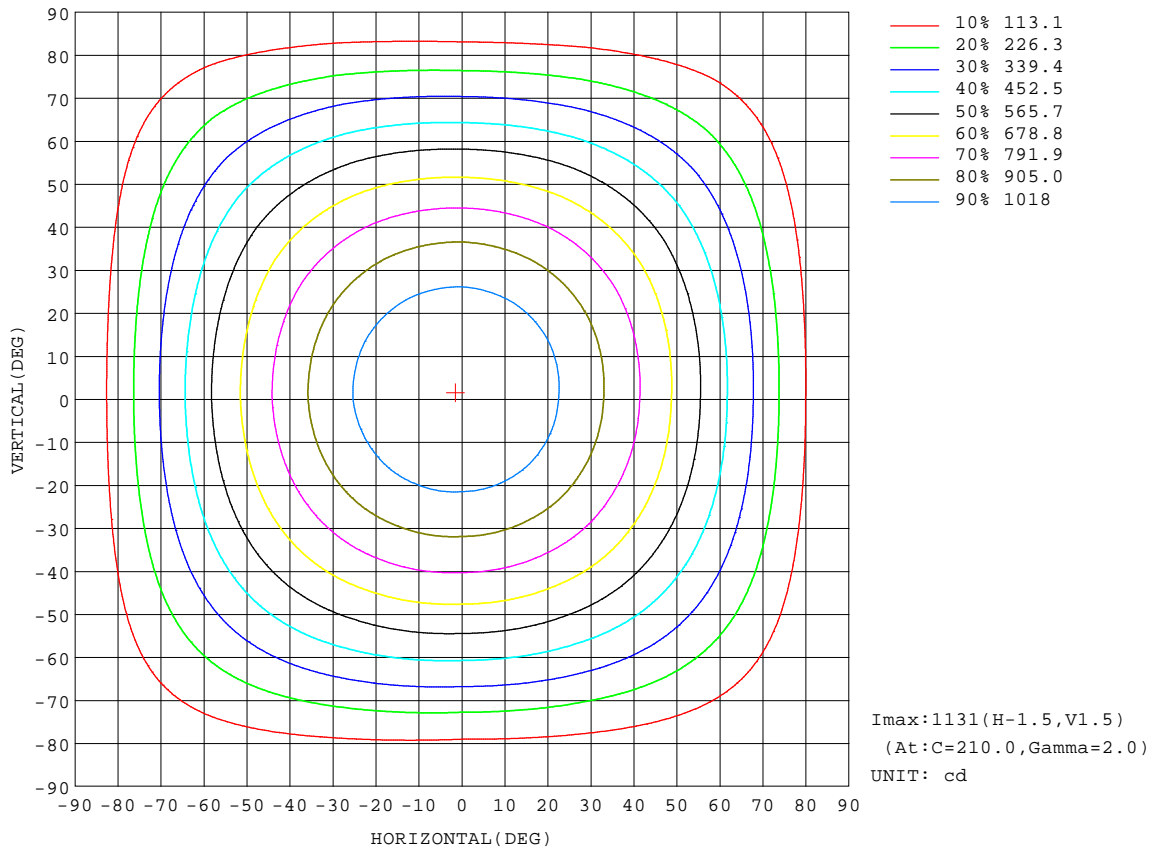


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

Flux out:2402 lm

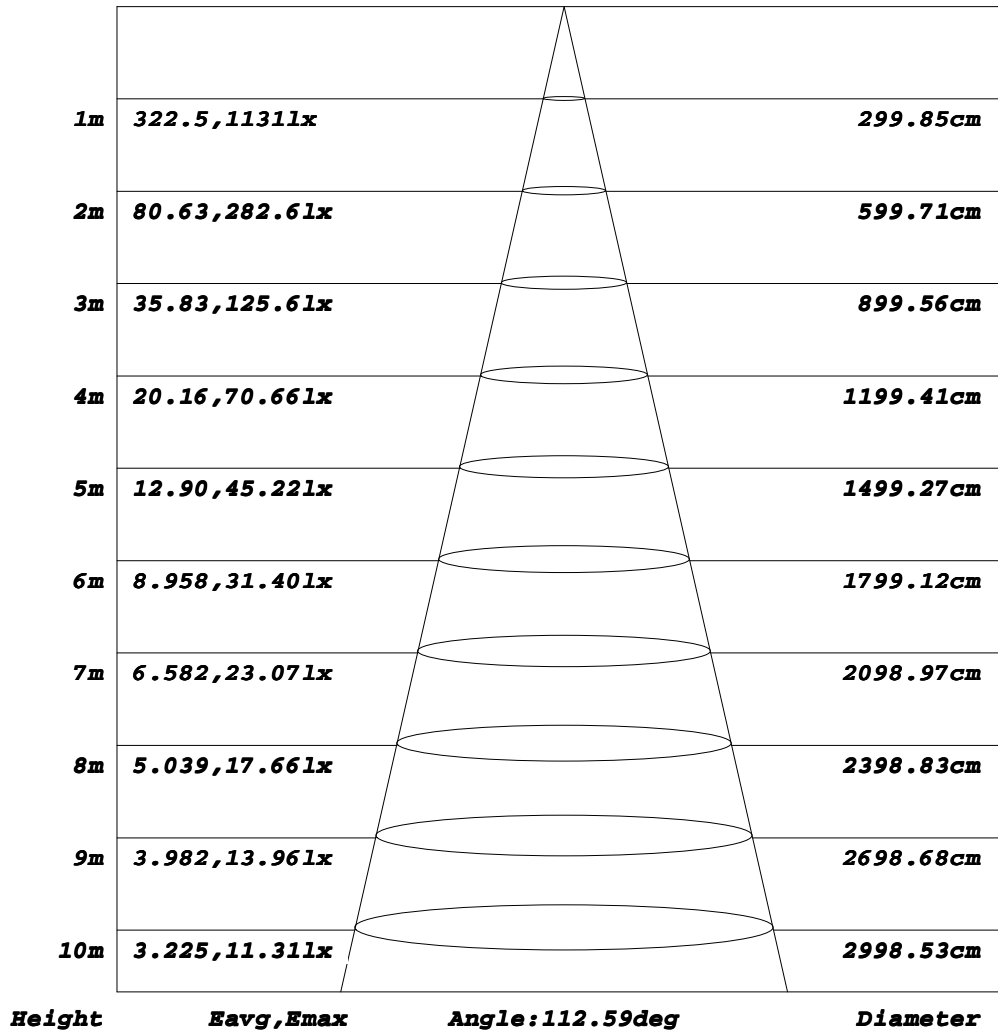


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz		
Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

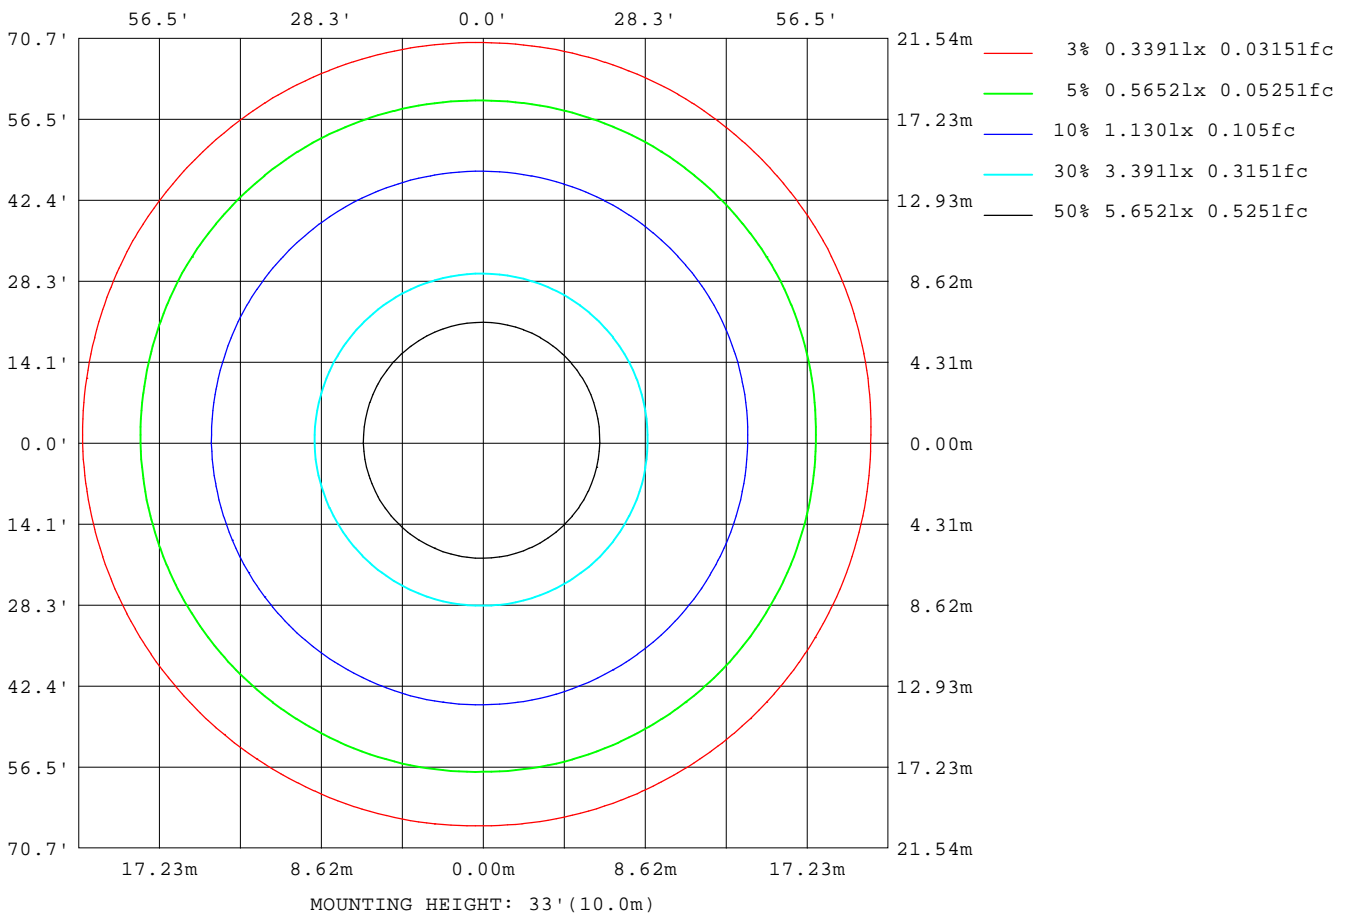

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

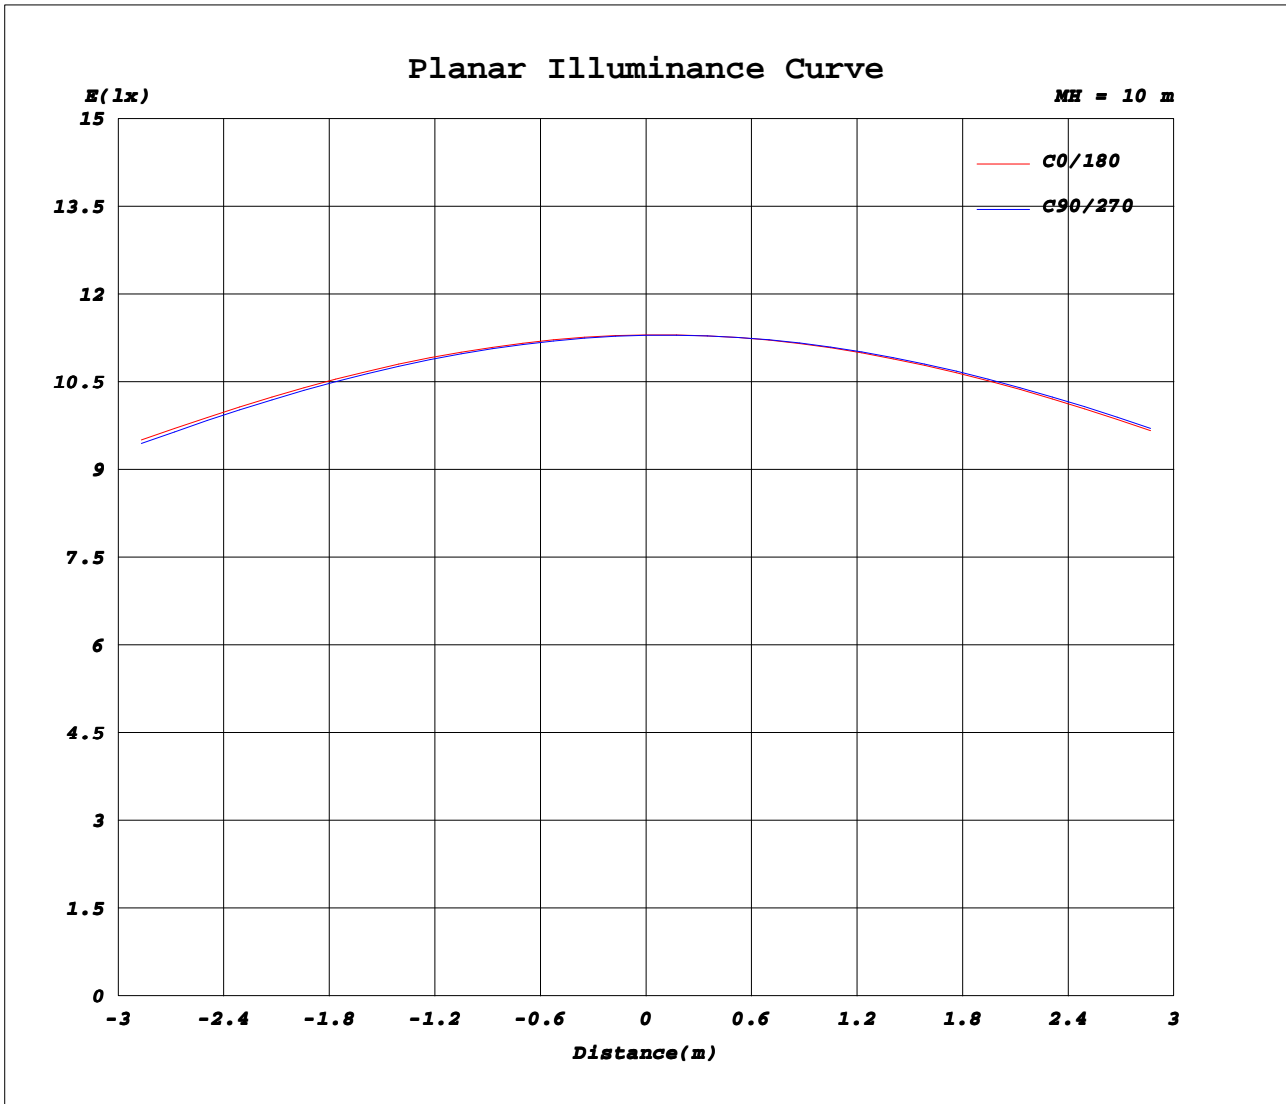

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.1510A P:31.400W PF:0.9400 Freq:50.00Hz Lamp Flux:3348.24x1 lm		
Name: NS60-595*595-30W (Round)	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: φ540mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1130	1130	1130	1130	1130	1130	1130	1130	1130	1130	1130	1130							
5	1122	1120	1119	1119	1121	1125	1128	1130	1130	1129	1127	1125							
10	1104	1101	1099	1100	1103	1110	1116	1118	1119	1119	1115	1110							
15	1077	1072	1070	1071	1076	1084	1094	1098	1099	1098	1093	1085							
20	1040	1033	1030	1032	1039	1050	1062	1067	1069	1068	1061	1051							
25	994	986	983	984	993	1007	1021	1028	1030	1028	1020	1008							
30	940	931	927	928	939	955	972	980	982	980	971	958							
35	879	869	864	865	878	896	915	923	926	924	914	899							
40	811	800	795	796	809	829	850	860	862	857	848	833							
45	736	725	719	720	735	757	779	789	790	783	776	761							
50	659	646	640	642	656	679	704	715	714	706	699	684							
55	574	561	555	556	572	596	621	633	631	620	615	601							
60	484	472	465	466	483	508	533	546	544	531	526	512							
65	392	382	375	374	392	417	441	456	453	439	435	422							
70	297	288	280	279	299	325	347	362	361	346	342	328							
75	201	193	186	185	205	230	252	268	267	251	248	234							
80	112	108	101	97.3	116	139	159	175	174	160	158	144							
85	41.9	37.4	32.7	31.3	44.4	60.2	74.6	89.9	93.3	85.2	80.4	67.2							
90	6.41	6.80	6.78	6.57	6.27	9.19	15.5	23.2	26.7	24.6	17.6	10.9							
95	7.27	7.45	7.35	7.14	7.27	7.91	8.76	8.73	8.52	8.42	8.68	8.40							
100	8.13	8.19	8.15	8.05	7.89	8.46	9.51	9.45	9.24	9.19	9.46	9.21							
105	8.95	8.98	8.97	8.92	8.64	9.17	10.3	10.2	10.0	10.0	10.2	9.98							
110	9.64	9.68	9.71	9.69	9.40	9.88	10.9	10.9	10.8	10.7	10.9	10.7							
115	10.3	10.3	10.4	10.4	10.1	10.6	11.6	11.5	11.4	11.4	11.6	11.3							
120	11.0	11.0	11.1	11.1	10.8	11.2	12.2	12.2	12.0	12.0	12.2	11.9							
125	11.6	11.7	11.7	11.8	11.5	11.9	12.8	12.8	12.7	12.7	12.9	12.6							
130	12.3	12.3	12.4	12.4	12.2	12.5	13.5	13.4	13.3	13.3	13.5	13.2							
135	12.9	13.0	13.1	13.1	12.8	13.2	14.0	14.0	13.9	13.9	14.0	13.8							
140	13.6	13.7	13.7	13.8	13.5	13.9	14.6	14.6	14.5	14.5	14.6	14.4							
145	14.3	14.4	14.4	14.5	14.3	14.5	15.2	15.2	15.1	15.1	15.2	15.0							
150	15.1	15.1	15.2	15.2	15.0	15.2	15.7	15.8	15.7	15.7	15.7	15.6							
155	15.9	15.8	15.9	16.1	15.8	15.8	16.3	16.4	16.3	16.3	16.3	16.2							
160	16.5	16.4	16.6	16.7	16.4	16.5	16.9	16.9	16.8	16.9	16.8	16.7							
165	16.9	17.0	17.1	17.2	16.9	17.0	17.3	17.3	17.3	17.3	17.3	17.2							
170	17.2	17.3	17.4	17.5	17.3	17.3	17.6	17.6	17.5	17.5	17.5	17.5							
175	17.5	17.6	17.7	17.7	17.8	17.8	17.8	17.8	17.7	17.7	17.7	17.6							
180	17.6	17.7	17.7	17.7	17.7	17.6	17.6	17.7	17.7	17.7	17.7	17.6							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: